



AVIVAPRODUCT GUIDE 2025

UPDATED OCTOBER 2025





TABLE OF CONTENTS

MODEL	PAGE	MODEL	PAGE
VENTILATION		COOKING	
POWER PACK	3-4	OTR MICROWAVE	9
AVD-306PSB3		AOTRM243SB	
AVM-278PS2		AOTRM303SB	
AVM-368PS2		AOTRS304SB	
AVP278S		RANGE	10
AVP368S AVP34108PS2		ACRE24CSB	
AVP44108PS2		REFRIGERATION	
AVP222PSB			
AVP243SB		BOTTOM MOUNT	11-12
AVP283SB		ARBM115SB	
UNDERCABINET	4-5	ARBM150SE2	
		ARBM177SE	
AVA-306RS2		ARBM188SE4	
AVA-366RS2		ARBM188WE4	
AVB-306RS2		FRENCH DOOR	13
AVG-306CS2		FRENCH DOOR	
AVU243RSB		ARBM184FSE3	
AVU303RSB		ARBM180FSE	
AVU305S		TOP MOUNT	14-15
AVV-309S2		104 1400141	14-13
AVV-369S2		ARTM116SB	
SLIDE-OUT	6	ARTM142SB	
SLIDE-OUT		ARTM180SE	
AVS243SB		ARTM180WE	
AVS303SB		WINE CELLARS +	
CHIMNEY	6-7	BEVERAGE CENTRES	5
AVH-308CS2		СОМВО	16
AVH-368CS2		BSC42DB3	
AVN-308CS3		VWD42S2	
AVN-368CS3			
AVO-308CS3		WINE CELLARS	17-18
AVO-368CS3		CWC46DS2	
AVT243CSB2		VPC46DS3	
AVT303CSB2		ABWC232SS	
AVW-308CS2		ABWC1622SS	
AVW-368CS2			10
ISLAND	8	BEVERAGE CENTRE	19
AVI-366IS4		CBC140SS3	_
AVI-369IS3		WARRANTY	20





POWER PACK MODEL FINISH SIZE (W x D)











AVD-306PSB3

BLACK GLASS

S 29 ½" x 11 ½"

- Power: 600 CFM, 5-speeds
- Lighting: 2 LED strips, 1.5W (included)
- Controls: Electronic LED controls
- Auto delay-off timer function
- · Overall height: 12"
- Aluminum mesh filter w/peripheral plate
- Duct transition: 6" round top
- Electrical requirements
 120V / 60Hz / 3.7A

AVM-278PS2 AVM-368PS2

201-GRADE SS

27 ³/₄" x 11 ³/₈" 35 ¹/₂" x 11 ³/₈"

- Power: 860 CFM, 3-speeds
- Lighting: 2 bulbs, 3W LED (included)
- Controls: Mechanical push buttons
- Overall height: 16"
- 2 sets of filters: Aluminum micro hole & stainless steel baffle (included)
- Duct transition: 6" and 8" round top
- Electrical requirements 120V / 60Hz / 2.7A

AVP278S AVP368S

201-GRADE SS

27 ³/₄" x 11 ³/₈" 35 ³/₈" x 11 ³/₄"

- Power: 860 CFM, 4-speeds
- Lighting: 2 bulbs, 3W LED
 3 colour levels
 (white, soft white, yellow)
- Controls: Soft touch square electronic controls
- Auto delay-off timer function
- Flush-fit installation with no visible screws
- Overall height: 11 ¾"
- 2 sets of filters: Aluminum micro hole
 & stainless steel baffle (included)
- Duct transition: 6"/8" round top and 3 1/4" x 10" top & rear
- Electrical requirements:
 120V / 60Hz
 3-prong plug included

AVP-34108PS2 AVP-44108PS2

430-GRADE SS

34 %" x 18" 44" x 18"

- Power: 1000 CFM, 4-speeds
- Lighting: 2 bulbs frosted LED 3500k (included)
- Controls: Electronic push buttons with LCD display
- Auto delay-off timer function
- \bullet Overall height: 14 % "
- 2 sets of filters: Aluminum micro hole filters and stainless steel baffle filters
- Duct transition: 8" and 10" round top
- Electrical requirements 120V / 60Hz / 3A





POWER PACK MODEL FINISH SIZE (W x D)





AVP222PSB

201-GRADE SS

22" x 11 1/4"

- Power: 200 CFM, 3-speeds
- Lighting: 2 bulbs, 2W LED (included)
- Controls: Mechanical push buttons
- Overall height: 6 %"
- Single aluminum micro hole filter (included)
- Duct transition: 6" round top
- Electrical requirements 120V / 60Hz / 1.3A

AVP243SB AVP283SB

430-GRADE SS

23 5%" x 11 3%" 27 5%" x 11 5%"

- Power: 290 CFM, 3-speeds
- Lighting: 2 bulbs, 2W LED (included)
- Controls: Mechanical push buttons
- Overall height: 10 1/8"
- Single aluminum mesh filter (included)
- Duct transition: 6" round top
- Electrical requirements 120V / 60Hz / 2A

UNDERCABINET

MODEL

FINISH

SIZE (W x D)



AVA-306RS2

AVA-366RS2

201-GRADE SS

29 ½" x 19 ¾" 35 ½" x 19 ¾"

- Power: 600 CFM, 3-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- Dual motor

- · 6" hood height
- 2 sets of filters: aluminum micro hole & stainless steel baffle (included)
- Duct transition: 6" round top and 3 1/4" x 10" rear and top
- Electrical requirements 120V / 60Hz / 2.7A



AVB-306RS2

201-GRADE SS

29 ½" x 19 ¾"

- Power: 600 CFM, 3-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- Dual motor

- 6" hood height
- 2 sets of filters: aluminum micro hole & stainless steel baffle (included)
- Duct transition: 6" round top and 3 ¼" x 10" rear and top
- Electrical requirements
 120V / 60Hz / 2.7A





UNDERCABINET

MODEL

FINISH

SIZE (W x D)



AVG-306CS2

201-GRADE SS

29 ½" x 22"

- Power: 600 CFM, 3-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- Dual motor
- 6" hood height
- 2 sets of filters: aluminum micro hole & stainless steel baffle (included)
- Duct transition: 6" round top and 3 ¼" x 10" rear and top
- Electrical requirements 120V / 60Hz / 0.5A



AVU305S

430-GRADE SS

29 ¾" x 21"

- Power: 500 CFM, 3-speeds
- Lighting: 2 x 2W LED 3 levels
- Controls: Electronic touch controls
- 6" hood height
- 2 sets of filters: Hybrid & stainless steel baffle (included)
- Duct transition: 7" round top and 3 1/4" x 10" rear and top
- Electrical requirements: 120V / 60 Hz / 2.5A



AVU243RSB AVU303RSB

201-GRADE SS

23 ³/₄" x 18 ⁷/₈" 29 ³/₄" x 18 ⁷/₈"

- Power: 280 CFM, 2-speeds
- Lighting: 2 bulbs, 3W LED (included)
- Controls: Mechanical push buttons
- 5" hood height
- · Aluminum mesh filters
- Duct transition: 3 ¼" x 10" rear and top
- Electrical requirements 110V / 60Hz / 0.45A



AVV-309S2 AVV-369S2

201-GRADE SS

29 ½" x 22" 35 ½6" x 22"

- Power: 900 CFM, 4-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- Dual motor

- 9 13/16" hood height
- Stainless steel baffle filters (included)
- Duct transition: 8" round top
- Electrical requirements
 120V / 60Hz / 2.7A





SLIDE-OUT **MODEL FINISH** SIZE (W x D)



AVS243SB AVS303SB

SS FRONT TRIM

23 %" x 11" 29 ½" x 11"

- Power: 290 CFM, 3-speeds
- Lighting: 2 bulbs, 2W LED (included)
- Controls: Mechanical slider
- Depth when open: 17 3/4"
- Overall height: 10 3/4"
- White body with stainless front trim
- · Aluminum mesh filter
- Duct transition: 6" round top
- Electrical requirements 120V / 60Hz / 2A

CHIMNEY	MODEL	FINISH	SIZE (W x D)
---------	-------	--------	--------------



AVH-308CS2 AVH-368CS2

201-GRADE SS

29 ½" x 19 ¾" 35 ½" x 19 ¾"

- Power: 860 CFM, 6-speeds
- Lighting: 2 x 3W LED 3 levels
- · Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- 2 sets of filters: aluminum micro hole & stainless steel baffle (included)
- 1 3/4" hood height
- Duct transition: 6" and 8" round top
- Chimney (ducted out) for ceiling heights up to 9'0"
- Optional accessory: Chimney extension AD-884S-22 (884mm high)
- Electrical requirements 120V / 60Hz / 2.7A



AVN-308CS3 AVN-368CS3

201-GRADE SS

29 ½" x 19 ¾" 35 ½" x 19 ¾"

- Power: 860 CFM, 6-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD Display
- Auto delay-off timer function
- Clean filter reminder
- · 2 stainless steel baffle filters (included)
- 7" hood height

- Duct transition: 6" & 8" round top and 3" 1/4 x 10" rear and top
- · Chimney (ducted out) for ceiling heights up to 9'0"
- Optional accessory: Chimney extension AD-884S-22 (884mm high)
- Electrical requirements 120V / 60Hz / 2.7A





CHIMNEY MODEL FINISH SIZE (W x D)



AVO-308CS3 AVO-368CS3

201-GRADE SS

29 ½" x 19 ¾" 35 ½" x 19 ¾"

- Power: 860 CFM, 6-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- 2 stainless steel baffle filters (inlcuded)
- 10 3/8" hood height
- Duct transition: 6" & 8" round top and 3" 1/4 x 10" rear and top
- Chimney (ducted out) for ceiling heights up to 9'0"
- Optional accessory: Chimney extension AD-780S-22 (780mm high)
- Electrical requirements 120V / 60Hz / 2.7A



AVT243CSB2 AVT303CSB2

430-GRADE SS

23 5/8" x 19 11/16" 29 1/2" x 19 11/16"

- Power: 290 CFM, 3-speeds
- Lighting: 2 X 2W LED
- Controls: Mechanical push buttons
- 1 %6" hood height
- 2 aluminum micro-hole filters
- Duct transition: 6" round top
- Chimney (ducted out) for ceiling heights up to 9'0"
- Ductless installation: AVTRECIRCKIT recirculating kit (purchase separately)
- Electrical requirements: 120V / 60Hz / 1.15A



AVW-308CS2 AVW-368CS2

201-GRADE SS

29 ½" x 19 ¾" 35 ½" x 19 ¾"

- Power: 860 CFM, 6-speeds
- Lighting: 2 x 3W LED 3 levels
- Controls: Soft touch with LCD display
- Auto delay-off timer function
- Clean filter reminder
- 2 sets of filters: aluminum micro hole & stainless steel baffle (inlcuded)
- 2 ¾" hood height
- Duct transition: 6" and 8" round top
- Chimney (ducted out) for ceiling heights up to 9'0"
- Optional accessory: Chimney extension AD-800S2 (800mm high)
- Electrical requirements 120V / 60Hz / 2.7A



ISLAND MODEL FINISH SIZE (W x D)



AVI-366IS4

430-grade SS + Black glass frame

35 ¼" x 23 %"

- Power: 600 CFM, 4-speeds
- 2W (included)
- Control: Electronic LCD controls display at front and rear of hood
- Auto delay-off timer function
- 2 3/4" hood height
- Lighting: 4 square LED lights, 3 Aluminum micro hole filters with stainless steel peripheral plate
 - Duct transition: 6" round top
 - Chimney (ducted out) for ceiling heights up to 9'0'
 - Electrical requirements 120V / 60Hz / 2.7A



AVI-369IS3

201-GRADE SS

35 ½" x 23 %"

- Power: 900 CFM, 6-speeds
- Lighting: 4 x 2W LED 3 levels
- Controls: Electronic soft touch 3 1/8" hood height with LCD display at front and rear of hood
- Auto delay-off timer function
- Clean filter reminder
- Aluminum micro-hole filters (included)
- Duct transition: 6" and 8" round top
- · Chimney (ducted out) for ceiling heights up to 9'0"
- Optional accessory: Chimney extension AD-860S2 (860mm high)
- Electrical requirements 120V / 60Hz / 2.7A

VENTILATION - MODEL NUMBER NOMENCLATURE

Α	AVIVA
V	Ventilation
LETTER	Model name
##	Size
#	CFM (1st digit)
C/I/P	Type of Hood: Chimney, Island, Power Pack
B/S	Color: Black / Stainless Steel
#	Generation

VENTILATION WARRANTY: 1-year parts and labor. AVP278S, AVP368S - 2-year parts and labor warranty.





COOKING

OTR MICROWAVE

MODEL

FINISH

SIZE (W x D)

AOTRM243SB

Black glass + SS trims

23 %" x 16 3/4"

- Capacity: 1.4 cu. ft.
- Power: 1000 Watts, 10 levels.
- Ventilation: 300 CFM, 2-speed
 Recessed handle, left-swing
- Duct transition: 3" ¼ x 10" top and rear
- 2 aluminum mesh filters (included)
- Convertible to ductless venting Electrical requirements: with charcoal filters (included)
- Controls: Soft touch electronic with LED display
- Multiple cooking modes, including Sensor Cooking
- Overall Height: 17 1/2"
- Lighting: 2 interior lights
 - 120V / 20A / 60Hz-2450Mhz



AOTRM303SB

Black glass + SS front

29 %" x 17 %"

- Capacity: 1.7 cu. ft.
- Power: 1000 Watts, 10 levels.
- Ventilation: 300 CFM, 2-speed
- Duct transition: 3" 1/4 x 10" top and rear
- 2 aluminum mesh filters (included)
- Convertible to ductless venting Lighting: 2 interior lights with charcoal filters (included) • Electrical requirements:
- Controls: Soft touch electronic with LED display
- · Heavy duty aluminum handle, left-swing
- · Multiple cooking modes, including Sensor Cooking
- Overall Height: 16 1/8"

 - 120V / 20A / 60Hz-2450Mhz



AOTRS304SB

Black glass + SS trims

29 1/8" x 18 13/16"

- Capacity: 1.2 cu. ft.
- Power: 1000 Watts, 10 levels.
- Duct transition: 9 13/16" x 2 5/8" top and rear
- 1 aluminum mesh filter (included)
- Convertible to ductless venting Electrical requirements: with charcoal filter (included)
- Controls: Soft touch electronic with LED display
- Ventilation: 400 CFM, 4-speed Recessed handle, left-swing
 - Multiple cooking modes, including Sensor Cooking
 - Overall Height: 11 3/8"
 - Lighting: 2 interior lights

 - 120V / 20A / 60Hz-2450Mhz



COOKING

RANGE MODEL FINISH SIZE (W x D)



ACRE24CSB Black glass + SS trims 23 ½" x 23 ½"

- Ceran-top electric range
- 4 electric zones:
 Right-Front: 6", 1200W
 Right-Rear: 8", 2000W
 Left-Front: 8", 2000W
 Left-Rear: 6", 1200W
- Cooking surface indicator lights:
 On/Off each element Hot-surface
- Oven indicator light
- Oven light
- Knob controls
- LED display for clock & timer

- True convection oven:
 Bake element: 2300W
 Broil element: 2600W
 Convection element: 2300W
- Oven capacity: 2.44 cu/ft
- 6 rack levels
- Includes 2 racks
- Bottom storage drawer
- Electrical requirements: 240V / 60Hz / 35-39.6A

OTR MICROWAVE MODEL NUMBER NOMENCLATURE

Α	AVIVA
OTR	Over-The-Range
M/S	Microwave / Slim
##	Size
#	CFM (1st digit)
S	Color: Stainless
В	Builder-focused

OTR MICROWAVE WARRANTY: 1-year parts and labor

COOKING RANGE MODEL NUMBER NOMENCLATURE

Α	AVIVA
С	Cooking
R	Range
E	Electric
##	Size
С	Convection
S	Color: Stainless
В	Builder-focused

COOKING RANGE WARRANTY: 2-years parts and labor

23 ½" x 27" x 68"



REFRIGERATION

BOTTOM MOUNT MODEL FINISH SIZE (W x D x H)









• Freestanding, bottom-mount refrigerator-freezer

- Capacity: 11.5 cu.ft. (Fridge 8.3 + Freezer 3.2)
- Flat door design
- Counter-depth

ARBM115SB

- Recessed, pocket door handle
- Reversible doors
- Internal electronic soft touch controls
- Interior LED lighting
- Frost-free, multi-airflow cooling system
- 3 glass shelves
- 1 large + 2 small door bins
- Large capacity crisper and 1 deli tray
- Freezer includes 2 glass shelves and 1 drawer
- Energy Star® rated
- R600A Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A



ARBM150SE2

STAINLESS STEEL

STAINLESS STEEL

27 5/8" x 26 1/2" x 67 3/4"

- Freestanding, bottom-mount refrigerator-freezer
- Capacity: 14.8 cu.ft. (Fridge 10.6 + Freezer 4.2)
- Slightly curved door design
- Counter-depth
- Recessed door handles
- Reversible doors
- Door open alarm
- Internal electronic soft touch controls
- Soft interior LED Lighting
- Multi airflow, ambient cooling system
- Precise temperature control
- Super Cool and Super freeze function
- 3 adjustable glass shelves
- 3 large + 2 adjustable door bins
- Large capacity crisper
- Freezer includes manual ice-maker with ice bin, 2 large drawers + 1 small tray
- Energy Star* rated
- R600A Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A







REFRIGERATION

BOTTOM MOUNT MODEL **FINISH** SIZE (W x D x H)











- Freestanding, bottom-mount refrigerator-freezer
- Capacity: 17.7 cu. ft. (Fridge 12.7 + Freezer 5)
- Flat-door design
- Metallic liner & backsplash
- Recessed door handles
- · Reversible doors
- Door open alarm
- Internal electronic soft touch controls
- Soft interior LED lighting
- Multi airflow, ambient cooling system
- Precise temperature control
- Super Cool and Super freeze function
- 3 adjustable glass shelves
- 1 large + 4 small height -adjustable door bins
- 2 half-width crispers
- Freezer includes 2 large drawers
- + 2 small travs
- Energy Star® rated
- R600A Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A



• Freestanding, bottom-mount, single-door slide-out drawer freezer

- Capacity: 18.7 cu. ft. (Fridge 13.1 + Freezer 5.6) • Flat-door design
- Recessed door handles
- Reversible fridge door
- Door open alarm
- Internal electronic touch controls
- Interior Lighting LED lights
- Dual temperature control system
- 2 height-adjustable glass shelves
- 1 large + 3 small height-adjustable door bins
- 2 crispers with humidity control
- Freezer includes 2 large slide-out bins (1 white + 1 clear)
- Energy Star* rated
- R600A Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A





29 ½" x 31 ½" x 66 ¾"

ARBM188WE4





REFRIGERATION

FRENCH DOOR

MODEL

FINISH

SIZE (W x D x H)



STAINLESS STEEL

29 ½" x 31" x 66 ¾"

- Freestanding, bottom-mount, French-door, slide-out drawer freezer
- Capacity: 18.4 cu. ft. (Fridge 12.8 + Freezer 5.6)
- Flat-door design
- Recessed door handles
- Internal electronic touch controls
- Door open alarm
- Interior Lighting LED lights
- Precise temperature control
- 2 height-adjustable glass shelves
- 6 large door bins (3 on each side)
- 2 crispers with humidity control
- Freezer includes 2 large storage bins (1 white + 1 clear)
- Energy Star* rated
- R600 Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A







STAINLESS STEEL

32 ¼" x 27 ¾" x 70"

- Freestanding, bottom-mount, French-door, slide-out drawer freezer
- Capacity: 18 cu. ft. (Fridge 12.5 + Freezer 5.4)
- Flat-door design
- Counter-depth
- Recessed door handles
- Internal electronic touch controls
- Interior Lighting LED lights
- 2 height-adjustable + 1 stationary glass shelves
- 6 large + 2 regular door bins
- 2 crispers with humidity control
- 2 large freezer drawers on ballbearing glides
- Energy Star® rated
- R600 Refrigerant gas
- Inverter compressor
- Electrical requirements 120V / 60Hz / 15A







23 ½" x 29" x 59 ½"



REFRIGERATION

TOP MOUNT MODEL FINISH SIZE (W x D x H)



• Freestanding, top mount refrigeratorfreezer

STAINLESS STEEL

• Capacity: 11.6 cu. ft. (Fridge 8.4 + Freezer 3.2)

• Flat door design

ARTM116SB

- Recessed door handles
- Reversible doors
- Internal electronic soft touch controls
- Interior LED lighting
- Frost-free, multi-airflow cooling system
- 3 glass shelves
- 2 large + 4 small door bins
- + bottle/pop can holder bins
- 2 crispers
- Freezer includes 1 wire shelf and 2 large door bins
- R600A Refrigerant gas
- Electrical requirements 120V / 60Hz / 15A







ARTM142SB

STAINLESS STEEL

27 ½" x 29" x 60 ½"

- Freestanding, top mount refrigerator-freezer
- Capacity: 14.2 cu. ft. (Fridge 10.6 + Freezer 3.6)
- Flat door design
- Recessed door handles
- Reversible doors
- Internal electronic soft touch controls
- Interior LED lighting
- Frost-free, multi-airflow cooling system
- 2 adjustable glass shelves
- 2 large door bins
- 1 large crisper
- Freezer includes 1 glass shelf and 2 large door bins
- Energy Star® rated
- R600A Refrigerant gas
- Electrical requirements 120V / 60Hz / 15A






REFRIGERATION

TOP MOUNT MODEL FINISH SIZE (W x D x H)



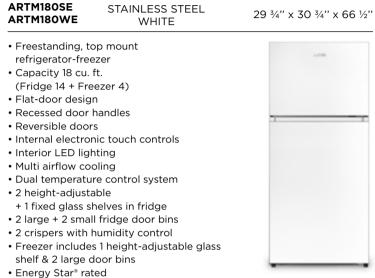

ENERGY STAR

• R600A Refrigerant gas

Inverter compressor

• Electrical requirements 120V / 60Hz / 15A

ARTM180WE

REFRIGERATION - MODEL NUMBER NOMENCLATURE

Α	AVIVA
R	Refrigerator
BM/TM	Bottom-mount / Top-mount
##	Capacity
F	French Door
S/W	Stainless Steel / White
E	Energy Star
#	Generation

WARRANTY: 2-years labor and replacement parts. Additional 3-year warranty, for a total of 5 years on the sealed system (components only).



23 ¾" x 23 ¼" x 34 ½"



WINE CELLARS & BEVERAGE CENTRES

COMBO MODEL FINISH SIZE (W x D* x H)

BSC42DB3



• Dual-zone, temperature range per zone: 39°- 64°F / 4-18°C

- Side by side configuration
- Built in or freestanding
- Flush fit installation
- Capacity: 21 bottles + 64 cans
- Door open alarm
- High-temperature alarm
- Soft-touch electronic controls
- Made of vitrified black glass
- + tinted and UV treated glass with Low-E argon gas
- SS Tubular Pro handle
- Interior lighting White LED
- Stainless steel kick plate
- 6 full-extension, ball-bearing metal racks with black wooden frontage
- + 3 glass shelves
- R600a Refrigerant gas



VWD42S2

SS + GLASS

BLACK + GLASS

23 ½" x 23 ¾" x 34 ½"

- Dual-zone temp. range per zone: 39° - 64°F / 4 - 18°C
- Side by side configuration
- Each side convertible to wine or beverage cooler
- Built in or freestanding
- Flush fit installation
- Total Capacity: 42 bottles or 21 bottles + 64 cans
- Door open alarm
- High-temperature alarm
- Soft-touch electronic controls

- Seamless, stainless steel doors
- Tinted glass with Low-E Argon gas
- SS tubular pro handle
- LED lighting color options: White, Blue, Yellow
- Stainless steel kick plate
- 12 wooden shelves with stainless steel front trim
- Includes 3 glass shelves for beverage configuration
- Sabbath mode
- R600a Refrigerant gas

^{*}Depth does not include handle.





WINE CELLARS & BEVERAGE CENTRES

WINE CELLAR



FINISH

SIZE (W \times D* \times H)

CWC46DS2

SS + GLASS

23 ½" x 23 ¾" x 34"

- Dual-zone, temperature range per zone: 41° - 64°F / 5 - 18° C
- Built in or freestanding
- Flush fit installation
- Capacity: 46 bottles
- Seamless, stainless steel door
- field reversible Door open alarm
- High-temperature alarm
- Electronic touch controls

- UV tinted glass with Low-E Argon gas
- SS Tubular Pro handle
- Interior lighting White LED
- · Black kick plate
- 5 soft-closing, full-extension, ball-bearing metal racks with wood front trim
- R600a Refrigerant gas



VPC46DS3

SS + GLASS

23 ¾" x 23 ½" x 34 ½"

- Dual-zone temperature range per zone: 39° - 64°F / 4 - 18°C
- Built in or freestanding
- Flush fit installation
- Capacity: 46 bottles
- Seamless, stainless steel door - field reversible
- Door open alarm
- High-temperature alarm

- Soft-touch electronic controls
- Tinted glass with Low-E Argon gas
- SS Tubular Pro handle
- Interior lighting White LED
- Stainless steel kick plate
- 5 full-extension, ball-bearing wooden shelves with stainless steel front trim
- R600a Refrigerant gas



*Depth does not include handle.

ABWC232SS

SS + GLASS

15" x 22 %16" x 34 1/4"

- Dual-zone temperature range: Upper zone: 41° - 54°F / 5 - 12°C • UV treated glass door Lower zone: 54° - 65° F / 12 - 18° C • SS Tubular Pro handle
- Built in or freestanding
- Flush fit installation
- Capacity: 23 bottles
- Seamless, stainless steel door
- field reversible
- Door open alarm
- High-temperature alarm

- · Soft-touch electronic controls

- · Blue LED lighting
- · Stainless steel kick plate
- 5 full-extension wooden shelves with stainless steel front trim
- · Sabbath mode
- R600a Refrigerant gas





WINE CELLARS & BEVERAGE CENTRES

WINE CELLAR - FULL SIZE

MODEL

FINISH

SIZE (W \times D* \times H)

ABWC1622SS

SS + GLASS

23 ½" x 26 %16" x 69 5/16"

- Dual-zone temperature range:
- Lower zone: 54° 65°F / 12 18°C SS Tubular Pro handle
- Built in or freestanding
- Flush fit installation
- Capacity: 162 bottles
- field reversible
- Door open alarm
- High-temperature alarm

- · Soft-touch electronic controls
- Upper zone: 41° 54°F / 5 12°C UV treated glass door

 - Blue LED light strips
 - Stainless steel kick plate
- Capacity: 162 bottles
 Seamless, stainless steel door
 13 full-extension wooden shelves with stainless steel front trim
 - Sabbath mode
 - R600a Refrigerant gas

^{*}Depth does not include handle.



23 ½" x 23 ½" x 34"



WINE CELLARS & BEVERAGE CENTRES

BEVERAGE CENTER MODEL FINISH SIZE (W x D* x H)

CBC140SS3



• Single-zone, temperature range:

34° - 50°F / 1 - 10°C

SS + GLASS

- Built in or freestanding
- Flush fit installation
- Capacity: 140 cans
- Seamless, stainless steel door
 - field reversible
- Door open alarm
- High-temperature alarm

*Depth does not include handle.

- Electronic touch controls
- UV tinted glass with Low-E Argon gas
- SS Tubular Pro handle
- Interior lighting White LED
- · Black kick plate
- 3 height-adjustable glass shelves
- R600a Refrigerant gas

WINE CELLARS & BEVERAGE CENTRES - MODEL NUMBER NOMENCLATURE

VP/BS/C	(Series) Vinopazzo / Black (Noire) / C Series
C/B/WC	Cellar / Beverage / Wine Cellar
NUMBER	Capacity
S/D	Single or Dual Zone
S/B	Stainless Steel or Black
#	Generation

WARRANTY: 2-year parts and labor, 5 years on sealed system (parts only).



WARRANTY

VENTILATION AND OTR MICROWAVE

We warrant our hoods and OTR's against defects in materials and workmanship under ordinary residential use for one (1) full year* from the date of original retail purchase. This limited warranty applies to any repair and /or replacement parts. This limited warranty is not subject to improper installation, accident, misuse, neglect, fire or other external causes, alterations, repair or commercial use.

*Two (2) full years for AVP278S and AVP368S.

COOKING RANGE

We warrant our cooking ranges against defects in materials and workmanship under ordinary residential use for two (2) full years from the date of original retailpurchase. This limited warranty applies to any repair and /or replacement parts. This limited warranty is not subject to improper installation, accident, misuse, neglect, fire or other external causes, alterations, repair or commercial use.

REFRIGERATION AND WINE & BEVERAGE CENTRES

Aviva refrigerators, wine cellars and beverage centres carry a two (2) year limited warranty on both parts and labor. Aviva warrants for two (2) years, to the purchaser of every new unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specified by Aviva and upon proper installation and start-up in accordance with the instruction manual supplied with the Aviva unit. Any parts covered under this warranty that are determined by Aviva to have been defective, within the above said period, are limited to the repair or replacement, including labor charges, of defective parts or assemblies.

In addition to the 2 year warranty period stated above, Aviva warrants its hermetically sealed compressor to be free from defects in both material and workmanship, under normal and proper use and maintenance, for a period of an additional 36 months (a total of 5 years on hermetically sealed compressor). The above said extended compressor warranty applies only to hermetically sealed parts of the compressor and DOES NOT apply to any other parts or components, including, but not limited to, cabinet, paint finish, temperature control, refrigerant, metering device, motor starting equipment, fan assembly, or any other electrical component, etc.

NOTES





-	





NOTES





NOTES



PRODUCT GUIDE 2025 AVIVA

T 800 361 0799 F 450 682 7943

www.distinctive-online.com info@distinctive-online.com

HEAD OFFICE & WAREHOUSE

2025 Cunard Street Laval QC H7S 2N1

WESTERN CANADA WAREHOUSE

NFI 1020 Derwent Way Delta, BC V3M 5R1

SERVICE DEPARTMENT

service@distinctive-online.com 800 561 7265

ORDER DESK

orderdesk@distinctive-online.com